

CLAMP TOP LINE POST

VERTICAL MOUNTING

45 kV

CAT. NO. 62156

ANSI CLASS 57-13

- 1 ENG. MGR
- 2 ENG
- PURCH.
- 1 MKTG.
- PLT.MGR.
- COST
- PRD.
- INSP
- GLAZE
- BUSHING
- MAKING
- SHIP
- ASSEM
- MODEL
- MACH.
- 45
- TOOLING
- CER LAB
- 1 EL LAB
- 1 E.MEDIA

DIMENSIONS:

LEAKAGE DISTANCE IN[mm] 29 [736]
 DRY ARCING DISTANCE IN[mm] 12.25[311]

MECHANICAL VALUES:

CANTILEVER LB[kN] 2,800[12.5]

ELECTRICAL VALUES:


60 HERTZ FLASHOVER-DRY kV 125
 60 HERTZ FLASHOVER-WET kV 95
 IMPULSE FLASHOVER-POS kV 200

RADIO INFLUENCE VOLTAGE DATA:

60 HERTZ TEST VOLTAGE TO GROUND kV 30
 MAXIMUM R.I.V. @ 1000 kHz μV 200

PACKAGING INFORMATION:

NET WEIGHT LB[kg] 25.31[11.48]
 PACKED WEIGHT LB[kg] 25.91[11.75]
 NO. IN STANDARD PACKAGE 2

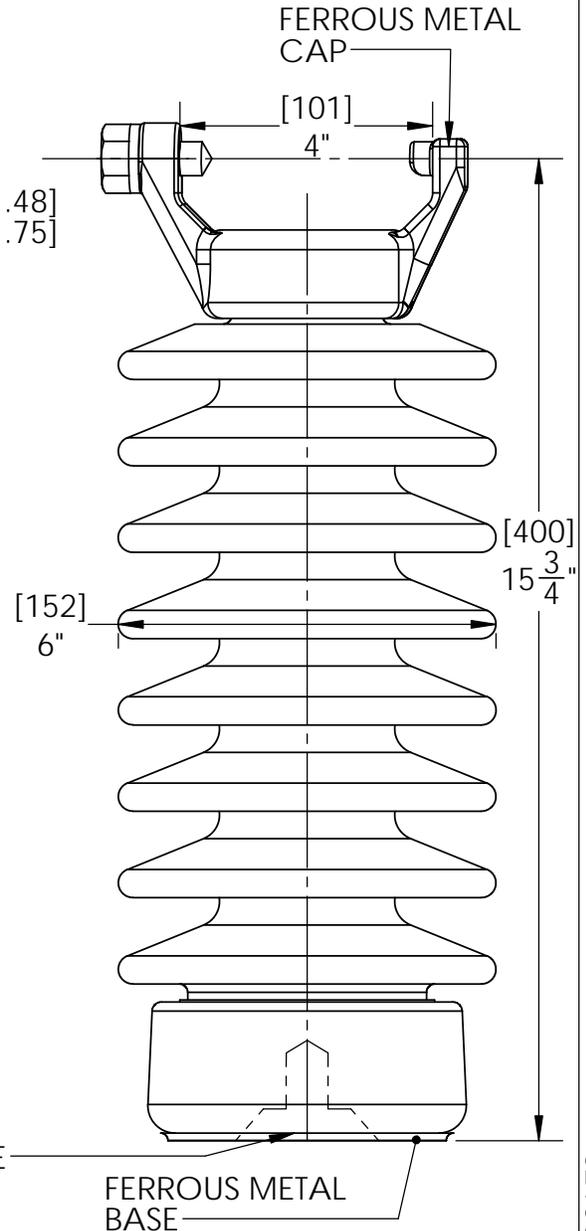

THIS DRAWING IS THE PROPERTY OF
 VICTOR INSULATORS, INC. AND CONTAINS
 PROPRIETARY AND CONFIDENTIAL INFORMATION
 WHICH MUST NOT BE DUPLICATED, USED,
 OR DISCLOSED OTHER THAN AS EXPRESSLY
 AUTHORIZED BY VICTOR INSULATORS, INC.

APPROVED
 By A. E. Schwalm at 7:47 am, Dec 07, 2016



Victor Insulators, Inc.
 280 Maple Avenue
 Victor, New York 14564
 Telephone: (585)924-2127
 www.victorinsulators.com

62156

11-21-16

AF|TM

SUPERSEDES 62156 DATED 7-9-98

62156